

HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT

NO. PWF/CB/2nd C /Tender/2025:-
To,

SS9-70

Dated:- 23/4/2025

The Executive Engineer, (IT Cell),
Nirman Bhawan, Nigam Vihar Shimla-2
e-mail:- cc-pwd-hp@nic.in

Subject:

Publication of Tender Notice.

Dear Sir,

Enclosed please find herewith the Tender Notice of work as given in the Notice Inviting Tender for uploading on department website as per notification Pr. Sec(PW) to the Govt. of HP letter No. PBW(B) A(3)1/2020 dated Shimla-2 the 16th July,2021 as the work mentioned in the tender notice are urgent in nature and in public interest.

DA/ Notice Inviting Tender.

Executive Engineer,
Fatehpur Division HPPWD,
Fatehpur

Copy forwarded for information to:-

1. The Superintending Engineers 9th Circle, HPPWD, Nurpur.
2. All the Assistant Engineers working under this Division.
3. Copy to AB/DB of this Division.
4. Notice Board.

Executive Engineer,
Fatehpur Division HPPWD,
Fatehpur

HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT

NOTICE INVITING TENDER

Sealed item rate tenders on the form 6&8 are invited by the Executive Engineer Fatehpur Division HPPWD, Fatehpur on behalf of the Governor of HP for the following works from the approved and eligible contractors enlisted in HPPWD.

TENDER SCHEDULE:

- | | |
|---|-------------------------|
| 1. Date and time of receipt of application for tender form: | 05.05.2025 upto 5.00 PM |
| 2. Date and time of issue of tender form: | 06.05.2025 upto 5.00 PM |
| 3. Date and time of receipt of tenders: | 07.05.2025 upto 11.00AM |
| 4. Date and time of opening of tenders: | 07.05.2025 at 11.30 AM |

The tenders form will be issued against cash payment (non refundable). The earnest money in the shape of NSC/FDR/Deposit at call of any of Post Office/Bank in H.P duly pledged in the name of the Executive Engineer, Fatehpur Division HPPWD Fatehpur must accompany with each tender. The Tender shall remain valid for 75 days from the date of opening of the tenders. If any of the date mentioned above happens to be local/Gazetted Holiday the same shall be process on next date.

Sr. No	Name of work	Estimated cost (in Rs.)	Earnest money (in Rs.)	Time limit	Cost Tender Form (in Rs.)	Eligible class of Contractor
1	Construction of Retaining wall near the house of Hardev Singh Village Pardah in G.P Manoh Sihal Under MLALAD (Deposit work) (SH:- Construction of Breast wall from RD. 0/0 to 0/014).	Rs.93,572/-	Rs.1900/-	One month	350/-	Class D&C
2	Construction of Retaining wall near the land of Hari Singh Village Manoh in G.P Manoh Sihal Under MLALAD (Deposit work) (SH:- Construction of Retaining wall from RD. 0/0 to 0/010.20).	Rs.96,699/-	Rs.2000/-	One month	350/-	Class D&C
3	Re-construction of restoration of Rain damage on link road from Pukhar Ka Talab to Shamshan Ghat Km. 0/0 to 1/050 (Under SDRF) Deposit work (SH:- Construction of edge wall at RD. 0/615 to 0/635)	Rs.95855/-	Rs.2000/-	One month	350/-	Class D&C
4	Construction of Drainage work (under ground pipes) Mintoo house to Jassur Pong Dam road village Moch in G.P Sunet (Under MLALAD) Deposit work (SH:- Construction of Drainage with RCC pipe at RD. 0/0 to 0/055).	Rs.95,726/-	Rs.2000/-	One month	350/-	Class D&C
5	Construction of Retaining wall near the house of Harbans Singh S/o Raseela Ram Village Diyana in G.P Diyana Under MLALAD (Deposit work) (SH:- Construction of Retaining wall from RD. 0/0 to 0/010).	Rs.96,588/-	Rs.2000/-	One month	350/-	Class D&C
6	Construction of RCC Slab near the house of Indu Devi in Village Sapdi in G.P Hadwal Under MLALAD (Deposit work) (SH:- Construction of RCC Slab).	Rs.94,244/-	Rs.1900/-	One month	350/-	Class D&C
7	Construction of Retaining wall near the house of Sanjeev Kumar S/o Hans Raj village Mangarh in G.P Pollian Under MLALAD (Deposit work) (SH:- Construction of Retaining wall).	Rs.95,680/-	Rs.2000/-	One month	350/-	Class D&C
8	Construction of Pucca Path from Yudhvir Singh House Mohalla Oansi Ward No. 2 in GP Hadwal under MLALAD (Deposit work) (SH:- Providing and Laying Interlocking concrete block pavement).	Rs.95,639/-	Rs.2000/-	One month	350/-	Class D&C
9	Construction of Drainage work (under ground pipes) Mintoo house to Jassur Pong Dam road village Moch in G.P Sunet (Under MLALAD) Deposit work (SH:- Construction of Drainage with RCC pipe at RD. 0/055 to 0/110).	Rs.93,278/-	Rs.1900/-	One month	350/-	Class D&C
10	Construction of Pucca Path alongwith Interlocking tiles from Billu House to Onkar Singh House Village Chhatral in GP Diyana (Under MLALAD) Deposit work (SH:- Providing and Laying Interlocking concrete block pavement at RD. 0/0 to 0/032).	Rs.94910/-	Rs.1900/-	One month	350/-	Class D&C

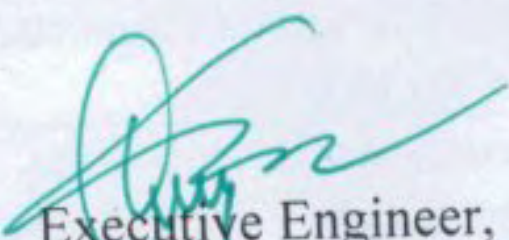
11	Compl. of Pucca Path from link road to Ashwani Kumar house Village Rudi in GP Diyana (Under MLALAD) Deposit work (SH:- Providing and Laying of Cement Concrete Pavement at RD. 0/0 to 0/035).	Rs.95,866/-	Rs.2000/-	One month	350/-	Class D&C
12	Construction of Pucca Path from Diyana Malhanta road to the house Harbans Singh S/o Raseela Ram Diyana (Under MLALAD) Deposit work (SH:- Providing and Laying of Cement Concrete Pavement at RD. 0/0 to 0/024).	Rs.48,517/-	Rs.1000/-	One month	350/-	Class D&C
13	Restoration of damage on Rehan Bharmar road Km. 0/0 to 3/100 (SH:- Construction of Retaining wall at RD. 0/500 to 0/514).	Rs.92,814/-	Rs.1900/-	One month	350/-	Class D&C
14	Construction of Retaining wall near the house of Reetam Singh Village Ganoh in G.P Kutwasi Under MLALAD (Deposit work) (SH:- Construction of Retaining wall from RD. 0/0 to 0/010).	Rs.95,883/-	Rs.2000/-	One month	350/-	Class D&C
15	Compl. of Pucca Path from link road to Ashwani Kumar house Village Rudi in GP Diyana (Under MLALAD) Deposit work (SH:- Providing and Laying of Cement Concrete Pavement at RD. 0/040 to 0/070).	Rs.95,863/-	Rs.2000/-	One month	350/-	Class D&C
16	Construction of Retaining wall near the house of Rajesh Kumar Ward No. 3 Village & G.P Fatehpur Under MLALAD (Deposit work) (SH:- Construction of Retaining wall from RD. 0/0 to 0/010).	Rs.95,812/-	Rs.2000/-	One month	350/-	Class D&C
17	Construction of Retaining wall near the house of Balkar Singh S/o Duni Chand Village Kohlari Mohal Nagal (Under SDRF) Deposit work (SH:- Construction of Retaining wall).	Rs.76,421/-	Rs.1600/-	One month	350/-	Class D&C
18	Construction of Retaining wall near the house of Shimlo Devi Village Ghaith Mohal Machhot (Under SDRF) Deposit work (SH:- Construction of Retaining wall).	Rs.75,252/-	Rs.1500/-	One month	350/-	Class D&C
19	Construction of Retaining wall Behind Parmod Singh house in Matial Mohal Khatiar (Under SDRF) Deposit work (SH:- Construction of Retaining wall).	Rs.95,242/-	Rs.1900/-	One month	350/-	Class D&C
20	Construction of Retaining wall near land of Kewal, Chain Singh etc. Village Minjgram Mohal Nagal (Under SDRF) Deposit work (SH:- Construction of Retaining wall).	Rs.95,343/-	Rs.1900/-	One month	350/-	Class D&C
21	Construction of Retaining wall near the house of Ashwani Guleria in Village Khurd Junat Mohal Dhameta (Under SDRF) Deposit work (SH:- Construction of Retaining wall).	Rs.94,723/-	Rs.1900/-	One month	350/-	Class D&C
22	Construction of Retaining wall near the house of Rakesh Kumar / Saroop Singh etc Mohal Hadwal (Under SDRF) Deposit work (SH:- Construction of Retaining wall).	Rs.95,200/-	Rs.1900/-	One month	350/-	Class D&C
23	Restoration of damage on Rehan Bharmar road Km. 0/0 to 3/100 (SH:- Construction of Retaining wall at RD. 0/515 to 0/530).	Rs.95,390/-	Rs.1900/-	One month	350/-	Class D&C
24	Construction of Retaining wall near Sadhu Ram house Mohal Baroona (Under SDRF) Deposit work (SH:- Construction of Retaining wall).	Rs.75,139/-	Rs.1900/-	One month	350/-	Class D&C
25	Construction of Retaining wall near the house of Pritam Singh S/O Madhu Ram Ward No. 1 Mohal Dhameta (Under SDRF) Deposit work (SH:- Construction of Retaining wall).	Rs.75,317/-	Rs.1900/-	One month	350/-	Class D&C

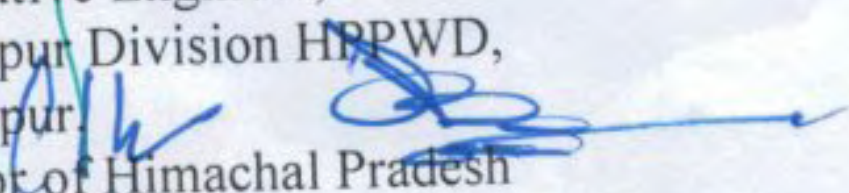
1. Certified that tender of above works are being called of emergent nature in exigency of public interest.

TERMS AND Conditions:-

1. The Contractor/Firm shall have his GST NO. & Copy of same be attached with the application.
2. The intending Contractor /Firm should have attached copy of registration/renewal.

3. The earnest money & cost of tender form for the above works should be submitted with the application for the purchase of the tender forms the application received without earnest money & cost of tender form shall summarily be rejected.
4. The tender form will be issued to those contractors who have not more than two works at the time of issue of tender forms. In this regard contractor has to submit an affidavit that he is not having more two works.
5. **Only two tenders from will be issued to the contractor/ firms which may be noted.**
6. The intending contractors are requested to see the site of the work before submitting the tender.
7. The Offer of the tender shall remain valid up to 75 days after the opening of tender.
8. The tender amount after negotiation should be **within limit of (+) 5%** otherwise the tender will be cancelled.
9. The Executive Engineer reserves the right to reject/accept any or all the tenders without assessing any reason.


Executive Engineer,
Fatehpur Division HPPWD,
Fatehpur.


On behalf of Governor of Himachal Pradesh

25 No

①

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the house of Hardev Singh Village Pardah G.P. Manoh Sihah Under (MLALAD)				Estimated cost:- Rs.93572/- only	
Deposit Work (SH:- Construction of Breast Wall from R.D. 0/0 to 0/014)				Earnest Money : Rs.1900/- only	
				Time limit:- one month	
Sr. No	Description of items	Quantity	Rate		Amount
			In words	In figures	
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	20.58 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	6987.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	24.36 cubic meter	3450.90	Rupees Three Thousand Four Hundred Fifty And Paise Ninety Only	84064.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer – in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	8.00 Numbers	315.10	Rupees Three Hundred Fifteen And Paise Ten Only	2521.00
				Total:-	93572.00

Amount quoted by the contractor in % Above/Below


 Executive Engineer
 Fatehpur Division HPPWD
 Fatehpur Distt. Kangra (H.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the land of Hari Singh village Manoh G.P. Manoh Sihla Under (MLALAD)
Deposit Work (SH:- Construction of Retaining Wall at R.D. 0/0 to 0/010.20)

Estimated cost:- Rs.96699/- only
Earnest Money : Rs.2000/- only
Time limit:- one month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	9.38 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	3185.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	26.72 cubic meter	3405.40	Rupees Three Thousand Four Hundred Five And Paise Forty Only	Per cubic meter	90992.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	8.00 Numbers	315.20	Rupees Three Hundred Fifteen And Paise Twenty Only	Each	2522.00
	Amount quoted by the contractor in % Above/Below				Total:-	96699.00

[Signature]
Executive Engineer
Patanchur Division HPPWD
Fatehpur Distt. Kangra

SCHEDULE OF QUANTITY

Estimated cost:- Rs.95855/- only

Earnest Money : Rs.2000/- only

Time limit:- One month

Name of work:- Re-Construction of Rain Damages on link road from Pukhar Ka Talab to Shamshan Ghat Km. 0/0 to 1/050 (Under SDRF) Deposit work (SH:- Construction of edge wall at R.D. 0/615 to 0/635)

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	8.20 Cubic meter.	339.30	Rupees Three Hundred Thirty Nine And Paise Thirty Only	Per cubic meter	2782.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	26.10 cubic meter	3450.60	Rupees Three Thousand Four Hundred Fifty And Paise Sixty Only	Per cubic meter	90061.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer – in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	10.00 Numbers	301.20	Rupees Three Hundred One And Paise Twenty Only	Each	3012.00
					Total:-	95855.00

Amount quoted by the contractor in %. Above/Below

Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (P.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Drainage Work (Under ground pipes) Mintoo house to Jassur Pong Dam road village Moch G.P. Sunet (Under MLALAD) Deposit work (SI:- Construction of Drainage with RCC Pipe at R.D. 0/0 to 0/055)		Estimated cost:- Rs.95726/- only		Earnest Money : Rs.2000/- only		Time limit:- One month	
Sr No	Description of items	Quantity		Rate		Unit	
		In words	In figures	In words	In figures	Unit	Amount
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	11.27 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter		3826.00
2	Providing and laying mechanically mixed and vibrated concrete for plain/ reinforced concrete in open foundation for all type of structure complete of plain cement concrete grade M-10 (M Ten) nominal mix 1:3:6 (One cement : three sand : six graded crushed/ broken stone aggregate 40mm (forty millimeter) nominal size in or under water and curing complete including pumping or bailing out water , dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work in toe walls as per drawings and M.O.R.D. technical specification sections 800, 900 & 1200 as per the direction of the Engineer-in-Charge . Including carriage of material within all leads and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	0.32 Cubic meter.	4410.30	Rupees Four Thousand Four Hundred Ten And Paise Thirty Only	Per cubic meter		1411.00
3	Providing and laying (to level or slope) 300mm dia (three hundred millimeter) diameter cement concrete pipe NP2 (burried conduits) on first class bedding of granular material fixing collar with cement sand mortar 1 : 2 (One cement : two sand) but excluding the cost of excavation, protection works, back filling, concrete and masonry work in head walls and parapets as per drawing and M.O.R.D. technical specifications clause 1106 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	52.50 Running meter	1650.60	Rupees One Thousand Six Hundred Fifty And Paise Sixty Only	Per Running meter		86657.00
4	Providing and laying mechanically mixed and vibrated concrete for plain/ reinforced concrete in open foundation for all type of structure complete of plain cement concrete grade M-20 (M- twenty) nominal mix 1:2:4 (One cement isto two sand isto four graded stone aggregate 20mm (twenty millimeter) nominal size in or under water and curing complete including pumping or bailing out water , dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work as per drawings and M.O.R.D. technical specification Clause 802,803,1202 and 1203 as per the direction of the Engineer-in-Charge . Including carriage of material within all leads and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	0.26 cubic meter	5210.90	Rupees Five Thousand Two Hundred Ten And Paise Ninety Only	Per cubic meter		1355.00
5	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Mild steel and Medium Tensile steel bars Including carriage of material within all leads and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	29.00 Killogram	85.40	Rupees Eighty Five And Paise Forty Only	Per Killogram		2477.00
Amount quoted by the contractor in % Above/Below					Total:-		95726.00

Executive Engineer
Farunpur Division HPPWD
Farunpur Distt. Kangra (H.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the house of Harbans Singh S/O Raseela Ram village Diyana G.P. Diyana (Under MLALAD) Deposit work (SH:- Construction of Retaining wall at R.D. 0/0 to 0/010)

Estimated cost:- Rs.96588/- only
Earnest Money : Rs.2000/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In -Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	9.38 Cubic meter.	322.50	Rupees Three Hundred Twenty Two And Paise Fifty Only	Per cubic meter	3025.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	26.72 cubic meter	3410.20	Rupees Three Thousand Four Hundred Ten And Paise Twenty Only	Per cubic meter	91121.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer – in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	8 Numbers	305.30	Rupees Three Hundred Five And Paise Thirty Only	Each	2442.00
					Total:-	96588.00

Amount quoted by the contractor in % Above/Below


Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)


SCHEDULE OF QUANTITY

Name of work:- Construction of R.C.C. Slab near the house of Indu Devi in village Sapdi G.P. Hadwal Under (MLALAD) Deposit work
(SH:- Construction of R.C.C. Slab)

Estimated cost:- Rs.94244/- only
Earnest Money : Rs.1900/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during devatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	7.83 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	2658.00
2	Providing and laying mechanically mixed and vibrated concrete in open foundation for all type of structure complete of plain cement concrete grade M-15(M fifteen) nominal mix 1:2.5:5 (One cement isto two point five sand isto five graded crushed/ broken stone aggregate 40mm (forty millimeter) nominal size in or under water and curing complete including pumping or bailing out water , dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work in abutment, dirt wall and parapet as per drawings and M.O.R.D technical specification section 800, 900, 1200 and 1100 as per the direction of the Engineer-in-Charge . Including carriage of material within all leads and lifts and other incidental . The rate is including octroi, royalty, Malkana, toll tax, Sale tax, GST or any other taxes imposed by the Government	9.14 Cubic meter.	4650.10	Rupees Four Thousand Six Hundred Fifty And Paise Ten Only	Per cubic meter	42502.00
3	Providing and laying mechanically mixed and vibrated reinforced cement concrete design mix to obtain the minimum compressive strength of R.C.C. grade M-20 (twenty) design mix with minimum cement contents not less then 350 kg. (Three hundred fifty kilograme) per cubic meter with 20mm (twenty millimeter) nominal size graded crushed stone aggregate in bed block, dirt wall etc. as per drawings and M.O.R.D. technical specification for roads clause 800,1400 including the cost of from work but excluding the cost of reinforcement for reinforced cement concrete work in wheel guard and the like up to any floor level and curing complete or under water including hauling of materials in all kinds of leads, lifts and other incidental. as per the entire satisfaction and direction of the Engineer -in-Charge and carriage of materials within all lead, lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, Sale tax, GST or any other taxes imposed by the Government.	1.35 Cubic meter.	6550.10	Rupees Six Thousand Five Hundred Fifty And Paise Ten Only	Per cubic meter	8843.00
4	Supplying, fitting and placing HYSD bar reinforcement in sub-structure complete as per drawing and technical specification clause 1002, 1005,1010 &1202 including cutting, bending, binding and placing in position complete in all respect including cost of binding wire upto any floor level as per the direction of the Engineer-in-charge including carriage of materials with in all leads and lifts. The rate are including octroi, royalty, Malkana, toll tax, Sale tax, GST or other taxes imposed by the Government.	0.20 Tonne	86290.00	Rupees Eighty Six Thousand Two Hundred Ninety Only	Per tonne	17258.00
5	Providing fitting and fixing Mild Steel Railing complete as per drawing and technical specification clause 1208.2 as per the direction of the Engineer-in-charge including carriage of materials with in all leads and lifts. The rate are including octroi, royalty, Malkana, toll tax, Sale tax, GST or other taxes imposed by the Government.	8.00 Running meter	2872.90	Rupees Two Thousand Eight Hundred Seventy Two And Paise Ninety Only	Per running meter	22983.00
					Total:-	94244.00

Amount quoted by the contractor in % Above/Below


Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the house of Sanjeev Kumar S/O Sh. Hans Raj village Mangarh G.P. Pollian Under (MLALAD) Deposit work (SH:- Construction of Retaining wall)

Estimated cost:- Rs.95680/- only
Earnest Money : Rs.2000/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	10.76 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	3653.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of nominal mix 1:4:8 (One cement isto four sand isto eight graded crushed/ broken stone aggregate 40mm (forty millimeter) nominal size in or under water including curing complete and pumping or bailing out water, dewatering, removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work complete in all respect as per drawing and M.O.R.D. technical specification sections and as per the entire satisfaction and direction of the Engineer -in-Charge and carriage of materials within all lead, and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government	22.48 Cubic meter.	3950.10	Rupees Three Thousand Nine Hundred Fifty And Paise Ten Only	Per cubic meter	88798.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614.709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	4.00 Numbers	315.00	Rupees Three Hundred Fifteen Only	Each	1260.00
4	Back filling behind abutments, wing wall and return wall complete as per drawing and M.O.R.D. technical specifications clause 1204.3.8 Granular material and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax GST or other taxes imposed by the Government.	2.52 Cubic meter.	781.30	Rupees Seven Hundred Eighty One And Paise Thirty Only	Per cubic meter	1969.00
					Total:-	95680.00
	Amount quoted by the contractor in % Above/Below					

Executive Engineer
Fararapur Division HPPWD
(Fararapur Distt. Kangra & P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Pucca Path from Yudhvir Singh House towards Surinder House Mohilla OANSI Ward No.2 G.P. Hadwal Under (MLALAD) Deposit work (SH:- Providing and laying interlocking paver block)

Estimated cost:- Rs.95639/- only
Earnest Money : Rs.2000/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of nominal mix 1:4:8 (One cement isto four sand isto eight graded crushed/ broken stone aggregate 40mm (forty millimeter) nominal size in or under water including curing complete and pumping or bailing out water, dewatering, removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work complete in all respect as per drawing and M.O.R.D. technical specification sections and as per the entire satisfaction and direction of the Engineer –in-Charge and carriage of materials within all lead, and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government	8.20 Cubic meter.	3950.10	Rupees Three Thousand Nine Hundred Fifty And Paise Ten Only	Per cubic meter	32391.00
2	Providing and laying of interlocking concrete block pavement having thickness 60mm (sixty millimeters) in grey and coloured shade APT or equivalent make over sand base as per drawing and technical specification clause 1504 complete approved by HPPWD and as per directions of Engineer-in-charge including carriage of materials. The rates is inclusive royalty, toll tax, GST, sale tax or any other taxes imposed by the Government.	80.00 Square meter	790.60	Rupees Seven Hundred Ninety And Paise Sixty Only	Per Square meter.	63248.00
					Total:-	95639.00
	Amount quoted by the contractor in % Above/Below					


Executive Engineer
Patnagar Division HPPWD
Patnagar Distt. Kangra (P.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Drainage Work (Under ground pipes) Mintoo house to Jasur Pong Dam road village Moch G.P. Sunet (Under MLALAD) Deposit work (SH:- Construction of Drainage with RCC Pipe at R.D. 0/055 to 0/110)

Estimated cost:- Rs.93278/- only
Earnest Money : Rs.1900/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	11.27 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	3826.00
2	Providing and laying mechanically mixed and vibrated concrete for plain/ reinforced concrete in open foundation for all type of structure complete of plain cement concrete grade M-10 (M Ten) nominal mix 1:3:6 (One cement : three sand : six graded crushed/ broken stone aggregate 40mm (forty millimeter) nominal size in or under water and curing complete including pumping or bailing out water , dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work in toe walls as per drawings and M.O.R.D. technical specification sections 800, 900 & 1200 as per the direction of the Engineer-in-Charge . Including carriage of material within all leads and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	0.32 Cubic meter.	4410.30	Rupees Four Thousand Four Hundred Ten And Paise Thirty Only	Per cubic meter	1411.00
3	Providing and laying (to level or slope) 300mm dia (three hundred millimeter) diameter cement concrete pipe NP2 (burried conduits) on first class bedding of granular material fixing collar with cement sand mortar 1 : 2 (One cement : two sand) but excluding the cost of excavation, protection works, back filling, concrete and masonry work in head walls and parapets as per drawing and M.O.R.D. technical specifications clause 1106 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	50.50 Running meter	1650.60	Rupees One Thousand Six Hundred Fifty And Paise Sixty Only	Per Running meter	83355.00
4	Providing and laying mechanically mixed and vibrated concrete for plain/ reinforced concrete in open foundation for all type of structure complete of plain cement concrete grade M-20 (M- twenty) nominal mix 1:2:4 (One cement isto two sand isto four graded stone aggregate 20mm (twenty millimeter) nominal size in or under water and curing complete including pumping or bailing out water , dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work as per drawings and M.O.R.D. technical specification Clause 802,803,1202 and 1203 as per the direction of the Engineer-in-Charge . Including carriage of material within all leads and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	0.26 cubic meter	5210.90	Rupees Five Thousand Two Hundred Ten And Paise Ninety Only	Per cubic meter	1355.00
5	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Mild steel and Medium Tensile steel bars Including carriage of material within all leads and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	39.00 Kilogram	85.40	Rupees Eighty Five And Paise Forty Only	Per Kilogram	3331.00
					Total:-	93278.00

Amount quoted by the contractor in % Above/Below


Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Pucca Path alongwith Interlocking tiles from Billu house to Onkar Singh House village Chhatral G.P. Diyana (Under MLALAD) Deposit work (SH:- Providing and laying interlocking concrete Block Pavement at R.D. 0/0 to 0/032)

Estimated cost:- Rs.94910/- only
Earnest Money : Rs.1900/- only

Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of nominal mix 1:4:8 (One cement isto four sand isto eight graded crushed/ broken stone aggregate 40mm (forty millimeter) nominal size in or under water including curing complete and pumping or bailing out water, dewatering, removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work complete in all respect as per drawing and M.O.R.D. technical specification sections and as per the entire satisfaction and direction of the Engineer -in-Charge and carriage of materials within all lead, and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government	8.00 Cubic meter.	3850.75	Rupees Three Thousand Eight Hundred Fifty And Paise Seventy Five Only	Per cubic meter	30806.00
2	Providing and laying of interlocking concrete block pavement having thickness 60mm (sixty millimeters) in grey and coloured shade APT or equivalent make over sand base as per drawing and technical specification clause 1504 complete approved by HPPWD and as per directions of Engineer-in-charge including carriage of materials. The rates is inclusive royalty, toll tax, GST, sale tax or any other taxes imposed by the Government.	80.00 Square meter	801.30	Rupees Eight Hundred One And Paise Thirty Only	Per Square meter.	64104.00
					Total:-	94910.00

Amount quoted by the contractor in % Above/Below


Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (B.P.)

35
2025-26

11

(4)

DRAFT SCHEDULE OF QUANTITY

Name of work:- Compl. Of Pucca Path from link road to Aswani Kumar house village Rudi G.P. Diyana Under (MLALAD) Deposit
Work (SH):- Providing and laying Cement Concrete Pavement at R.D. 0/0 to 0/035)
Estimated cost:- Rs.95866/- only
Earnest Money : Rs.2000/- only
Time limit:- one month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	19.60 Cubic meter.	339.45	Rupees Three Hundred Thirty Nine And Paise Forty Five Only	Per cubic meter	6653.00
2	Providing and laying mechanically mixed and vibrated concrete for plain/ reinforced concrete in open foundation for all type of structure complete of plain cement concrete grade M-20 (M- twenty) nominal mix 1:2:4 (One cement isto two sand isto four graded stone aggregate 20mm (twenty millimeter) nominal size in or under water and curing complete including pumping or bailing out water , dewatering removal of slush as required at site which may arise at the time of laying under water complete laying and fixing of 125 (one hundred twenty five) micron thick polythene film for all heights/ depths including the cost of form work as per drawings and M.O.R.D. technical specification Clause 802,803,1202 and 1203 as per the direction of the Engineer-in-Charge . Including carriage of material within all leads and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	16.80 cubic meter	5310.30	Rupees Five Thousand Three Hundred Ten And Paise Thirty Only	Per cubic meter	89213.00
					Total:-	95866.00

Draft Schedule of Quantity checked and approved for R. 95866/Paid Rs. Ninety five thousand eight hundred sixty six only)

Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Pucca Path from Diyana Malhanta road to the house Harbans Singh S/O Raseela Ram village Diyana G.P. Diyana Under (MLALAD) Deposit work (SH:- Providing and laying Cement Concrete Pavement at R.D. 0/0 to 0/024)						
Estimated cost:- Rs.48517/- only						
Earnest Money : Rs.1000/- only						
Time limit:- one month						
Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Providing and laying mechanically mixed and vibrated concrete for plain/ reinforced concrete in open foundation for all type of structure complete of plain cement concrete grade M-20 (M- twenty) nominal mix 1:2:4 (One cement isto two sand isto four graded stone aggregate 20mm (twenty millimeter) nominal size in or under water and curing complete including pumping or bailing out water , dewatering removal of slush as required at site which may arise at the time of laying under water complete laying and fixing of 125 (one hundred twenty five) micron thick polythene film for all heights/ depths including the cost of form work as per drawings and M.O.R.D. technical specification Clause 802,803,1202 and 1203 as per the direction of the Engineer-in-Charge . Including carriage of material within all leads and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	9.00 cubic meter	5390.80	Rupees Five Thousand Three Hundred Ninety And Paise Eighty Only	Per cubic meter	48517.00
					Total:-	48517.00
Amount quoted by the contractor in % Above/Below						


 Executive Engineer
 Farunpur Division HPPWD
 Farunpur Distt. Kangra (P.J.)

42
2025-26

13

DRAFT SCHEDULE OF QUANTITY

DRAFT SCHEDULE OF QUANTITY									
Name of work:-Restoration of damages of Rehan Bhammar road Km. 0/0 to 3/100 (SH):- Construction of Retaining wall at R.D. 0/500 to 0/514)									
Estimated cost:- Rs.92814/- only									
Earnest Money : Rs.1900/- only									
Time limit:- one month									
Sr. No	Description of items	Quantity	Rate		Unit	Amount			
			In words	In figures					
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	7.00 (Cubic meter.	339.45	Rupees Three Hundred Thirty Nine And Paise Forty Five Only	Per cubic meter	2376.00			
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	24.00 cubic meter	3360.00	Rupees Three Thousand Three Hundred Sixty Only	Per cubic meter	80640.00			
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer – in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	13 Numbers	285.00	Rupees Two Hundred Eighty Five Only	Each	3705.00			
4	Back filling behind abutments, wing wall and return wall complete as per drawing and M.O.R.D. technical specifications clause 1204.3.8 Granular material and as per direction of Engineer – in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax GST or other taxes imposed by the Government.	8.20 Cubic meter.	743.00	Rupees Seven Hundred Forty Three Only	Per cubic meter	6093.00			
					Total:-	92814.00			

Draft Schedule of Quantity checked & approved
for Rs. 92814/- only. (Rs. Ninety two thousand eight hundred fifteen only)

Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

14


SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the house of Reetam Singh village Ganoh G.P. Kutwasi Under (MLALAD)
Deposit Work (SH):- Construction of Retaining wall at R.D. 0/0 to 0/010)

Estimated cost:- Rs.95883/- only
Earnest Money : Rs.2000/- only
Time limit:- one month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arrise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	10.00 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	3395.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	26.46 cubic meter	3400.10	Rupees Three Thousand Four Hundred And Paise Ten Only	Per cubic meter	89967.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	8.00 Numbers	315.10	Rupees Three Hundred Fifteen And Paise Ten Only	Each	2521.00
					Total:-	95883.00

Amount quoted by the contractor in % Above/Below


Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

15

SCHEDULE OF QUANTITY

Name of work:- Compl. Of Pucca Path from link road to Ashwani Kumar house village Rudi G.P. Diyana Under (MLALAD) Deposit				Estimated cost:- Rs.95863/- only	
Work (SH):- Providing and laying Cement Concrete Pavement at R.D. 0/040 to 0/070)				Earnest Money : Rs.2000/- only	
				Time limit:- one month	
Sr. No	Description of items	Quantity	Rate		Amount
			In words	In figures	
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	19.60 Cubic meter.	339.45	Rupees Three Hundred Thirty Nine And Paise Forty Five Only	6653.00
2	Providing and laying mechanically mixed and vibrated concrete for plain/ reinforced concrete in open foundation for all type of structure complete of plain cement concrete grade M-20 (M- twenty) nominal mix 1:2:4 (One cement isto two sand isto four graded stone aggregate 20mm (twenty millimeter) nominal size in or under water and curing complete including pumping or bailing out water , dewatering removal of slush as required at site which may arise at the time of laying under water complete laying and fixing of 125 (one hundred twenty five) micron thick polythene film for all heights/ depths including the cost of form work as per drawings and M.O.R.D. technical specification Clause 802,803,1202 and 1203 as per the direction of the Engineer-in-Charge . Including carriage of material within all leads and lifts and other incidental . The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	16.80 cubic meter	5310.10	Rupees Five Thousand Three Hundred Ten And Paise Ten Only	89210.00
				Total:-	95863.00
	Amount quoted by the contractor in % Above/Below				

Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the house of Rajesh Kumar Ward No.3 village Fatehpur G.P. Fatehpur Under (MLALAD) Deposit Work (SH:- Construction of Retaining wall at R.D. 0/0 to 0/010)

Estimated cost:- Rs.95812/- only
Earnest Money : Rs.2000/- only
Time limit:- one month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	9.70 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	3293.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D. technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	26.46 cubic meter	3401.30	Rupees Three Thousand Four Hundred One And Paise Thirty Only	Per cubic meter	89998.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	8.00 Numbers	315.10	Rupees Three Hundred Fifteen And Paise Ten Only	Each	2521.00
					Total:-	95812.00

Amount quoted by the contractor in % Above/Below


Executive Engineer
Satnagar Division HPPWD
Fatehpur Distt. Kangra (P.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of retaining wall near house of Balkar Singh S/O Duni Chand village Kolhari Mohal Nagal (Under SDRF) Deposit work (SH:- Construction of Retaining wall)

Estimated cost:- Rs.76421/- only
Earnest Money : Rs.1600/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer-In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	9.72 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	3300.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	20.46 cubic meter	3450.60	Rupees Three Thousand Four Hundred Fifty And Paise Sixty Only	Per cubic meter	70599.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614.709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	8.00 Numbers	315.20	Rupees Three Hundred Fifteen And Paise Twenty Only	Each	2522.00
					Total:-	76421.00

Amount quoted by the contractor in % Above/Below

Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (R.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the house of Shimlo Devi village Ghaith Mohal Machchhot (Under SDRF) Deposit work (SH:- Construction of Retaining wall)

Estimated cost:- Rs.75252/- only
Earnest Money : Rs.1500/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer-In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	9.72 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	3300.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	20.46 cubic meter	3440.90	Rupees Three Thousand Four Hundred Forty And Paise Ninety Only	Per cubic meter	70401.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer – in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	5.00 Numbers	310.20	Rupees Three Hundred Ten And Paise Twenty Only	Each	1551.00
					Total:-	75252.00

Amount quoted by the contractor in % Above/Below

Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

19

SCHEDULE OF QUANTITY

SCHEDULE OF QUANTITY							Estimated cost:- Rs.95242/- only	
Name of work:- Construction of Retaining wall behind Parmod Singh house in Matial Mohal Khatiar (Under SDRF) Deposit work (SH:-Construction of Retaining wall)							Earnest Money : Rs.1900/- only	
							Time limit:- One month	
Sr. No	Description of items	Quantity	Rate		Unit	Amount		
			In words	In figures				
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer-In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	13.98 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	4746.00		
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	25.67 cubic meter	3440.60	Rupees Three Thousand Four Hundred Forty And Paise Sixty Only	Per cubic meter	88320.00		
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer – in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	7.00 Numbers	310.90	Rupees Three Hundred Ten And Paise Ninety Only	Each	2176.00		
					Total:-	95242.00		
	Amount quoted by the contractor in % Above/Below							

Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near land of Kewal, Chain Singh etc. village Minjigran Mohal Nagal (Under SDRF) Deposit work SH:- Construction of Retaining wall)

Estimated cost:- Rs.95343/- only
Earnest Money : Rs.1900/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer-In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	12.16 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	4128.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	26.27 cubic meter	3390.10	Rupees Three Thousand Three Hundred Ninety And Paise Ten Only	Per cubic meter	89058.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi,-royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	7.00 Numbers	308.10	Rupees Three Hundred Eight And Paise Ten Only	Each	2157.00
					Total:-	95343.00

Amount quoted by the contractor in % Above/Below

Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the house of Ashwani Guleria in village Khurd Junal Mohal Dhameta (Under SDRF) Deposit work (SH:- Construction of Retaining wall)

Estimated cost:- Rs.94723/- only
Earnest Money : Rs.1900/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer-In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	18.02 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	6118.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	25.50 cubic meter	3390.10	Rupees Three Thousand Three Hundred Ninety And Paise Ten Only	Per cubic meter	86448.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	7.00 Numbers	308.10	Rupees Three Hundred Eight And Paise Ten Only	Each	2157.00
					Total:-	94723.00

Amount quoted by the contractor in % Above/Below

Executive Engineer

Fatehpur Division HPPWD

Fatehpur Distt. Kangra

22

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the house of Rakesh Kumar/Saroop Singh etc. Mohal Hadwal (Under SDRF) Deposit work (SH:- Construction of Retaining wall)

Estimated cost:- Rs.95200/- only
Earnest Money : Rs.1900/- only
Time limit:- One month

Sr. No	Description of items	Quantity	Rate		Unit	Amount
			In words	In figures		
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer-In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	11.71 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	3976.00
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	26.00 cubic meter	3390.10	Rupees Three Thousand Three Hundred Ninety And Paise Ten Only	Per cubic meter	88143.00
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST, or other taxes imposed by the Government.	10.00 Numbers	308.10	Rupees Three Hundred Eight And Paise Ten Only	Each	3081.00
					Total:-	95200.00

Amount quoted by the contractor in % Above/Below

[Signature]
Executive Engineer

Fatehpur Division HPPWD
Fatehpur Distt. Ka. Gra (H.P.)

23

SCHEDULE OF QUANTITY

Name of work:-Restoration of damages of Rehan Bhammar road Km. 0/0 to 3/100 (SH:- Construction of Retaining wall at R.D. 0/515 to 0/530)							Estimated cost:- Rs.95390/- only	
							Earnest Money : Rs.1900/- only	
							Time limit:- one month	
Sr. No	Description of items	Quantity	Rate		Unit	Amount		
			In words	In figures				
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer- In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	7.00 Cubic meter.	339.45	Rupees Three Hundred Thirty Nine And Paise Forty Five Only	Per cubic meter	2376.00		
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	24.00 cubic meter	3360.00	Rupees Three Thousand Three Hundred Sixty Only	Per cubic meter	80640.00		
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614.709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	15 Numbers	285.00	Rupees Two Hundred Eighty Five Only	Each	4275.00		
4	Back filling behind abutments, wing wall and return wall complete as per drawing and M.O.R.D. technical specifications clause 1204.3.8 Granular material and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax GST or other taxes imposed by the Government.	10.90 Cubic meter.	743.00	Rupees Seven Hundred Forty Three Only	Per cubic meter	8099.00		
						Total:-	95390.00	
Amount quoted by the contractor in % Above/Below								



Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

24

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near Sadhu Ram house Mohal Baroona (Under SDRF) Deposit work (SH:- Construction of Retaining wall)						Estimated cost:- Rs.75139/- only	
						Earnest Money : Rs.1500/- only	
						Time limit:- One month	
Sr. No	Description of items	Quantity	Rate		Unit	Amount	
			In words	In figures			
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer-In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	12.17 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	4132.00	
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	20.40 cubic meter	3390.10	Rupees Three Thousand Three Hundred Ninety And Paise Ten Only	Per cubic meter	69158.00	
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	6.00 Numbers	308.10	Rupees Three Hundred Eight And Paise Ten Only	Each	1849.00	
					Total:-	75139.00	
	Amount quoted by the contractor in % Above/Below						

Executive Engineer
Fatehpur Division HPPWD
Fatehpur Distt. Kangra (H.P.)

25

SCHEDULE OF QUANTITY

Name of work:- Construction of Retaining wall near the house of Pritam Singh S/O Madhu Ram Ward No.1 Mohal Dhameta (Under SDRF) Deposit work (SH:-Construction of Retaining wall)								Estimated cost:- Rs.75317/- only		Earnest Money : Rs.1500/- only		Time limit:- One month	
Sr. No	Description of items	Quantity	Rate		Unit	Amount							
			In words	In figures									
1	Earth work in excavation for foundation of structure such as retaining walls, breast walls, culverts, drains and parapets ectetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 section 300 and as per direction of the Engineer-In - Charge including setting out, shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimeter) compacted thickness of each layers including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per entire satisfaction and the direction of Engineer-in-Charge. Including carriage of materials within all leads and lifts and other incidental .	9.72 Cubic meter.	339.50	Rupees Three Hundred Thirty Nine And Paise Fifty Only	Per cubic meter	3300.00							
2	Providing and laying mechanically mixed and vibrated plain cement concrete in open foundation for all type of structure complete of plain cement concrete nominal mix 1:5:10 (One cement isto five sand isto ten graded crushed/broken stone aggregate 40mm (Forty millimeter)nominal size in or under water including curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths in parapet including the cost of form work as per drawing and M.O.R.D technical specification as per the direction of Engineer-in-charge including carriage of material within all leads and lifts and other incidental. The rate including of octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	20.50 cubic meter	3390.10	Rupees Three Thousand Three Hundred Ninety And Paise Ten Only	Per cubic meter	69497.00							
3	Providing and laying 100mm dia (Hundred millimeter) diameter P.V.C. pipe having pressure not less than 4.5 kilogram (four point five kilogram) per centimetre square weep holes in brick masonry/ stone masonry, plain/reinforced concrete abutment, wing wall, return wall and retaining/breast walls through the full width of the structures with slope of 1(V): 20(H)(one vertical: twenty horizontal) towards drainage face complete as per drawing and M.O.R.D. technical specifications clause 614,709,1204.3.7 and as per direction of Engineer - in- Charge including carriage of materials within all leads and lifts and other incidental . The rate including octroi, royalty, Malkana, toll tax, sale tax, GST or other taxes imposed by the Government.	8.00 Numbers	315.00	Rupees Three Hundred Fifteen Only	Each	2520.00							
					Total:-	75317.00							
Amount quoted by the contractor in % Above/Below													

Executive Engineer
Kapurthala Division HPPWD
Kapurthala District Kangra (H.P.)