

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDER**

Sealed item rate / percentage rate tender are hereby invited on Form No. 6& 8 by the Executive Engineer, Bhoranj Division, HPPWD, Bhoranj on behalf of the Governor of Himachal Pradesh for the following works from the approved and eligible contractors/ firms of appropriate class enlisted in HPPWD (B&R) whose registration stood registered under the H.P. General Sales tax Act, 1968. As per latest instructions so as to reach and open in his office as per time schedule given below. The offer of the tender will be kept open for 20 days from the date of opening of the tenders. The undersigned reserves the right to reject any or all the tenders without assigning any reasons.

1. Date of receipt of Applications for tender form a/w requisite documents:- 01-12-2025 upto 10.00 AM to 11:00 AM.)
2. Date of issue/Sale of tender forms against Cash payment (Non- refundable) 01-12-2025 (3:00 PM to 5.00 PM)
3. Date of receipt of Tender:- 02-12-2025 at 10.30 AM.
4. Date of opening of Tender:- 02-12-2025 at 11.30 AM.

Sr. No.	Name of Road	Estimated Cost	Earnest Money	Time	Cost of Tender Form	Eligible class of Contractor
1	C/O link road Chhatrail to Lower Dadu Km 0/00 to 1/630 (SH:- ROFD Bed cutting 5/7 mtr. Wide road at RD 1/505 to 1/565)	99028/-	2000/-	Two Months	Rs. 350/-	Class-D
2	R/M of Drainage Bassi Badyana Lawanyana Lawanyana Manoh road Km 0/00 to 5/00 (SH:- Maintenance of earthen shoulder & Unlined Surface drain)	99876/-	2000/-	Two Months	Rs. 350/-	Class-D
3	Restoration of Dadu Chatrial road km 0/00 to 1/250 (SH:- P/L interlocking paver block at RD 1/130 to 1/200) PDNA	498252/-	10000/-	Two Months	Rs. 350/-	Class-D
4	R/M of damages Bhoranj Balore Samlog road Km 0/00 to 5/00 (SH:- Maintenance of earthen shoulder & Unlined surface drain)	99876/-	2000/-	Two Months	Rs. 350/-	Class-D
5	Restoration of Hamirpur Jahu road km 23/00 to 32/00 (SH:- Maintenance of Removal of slip) (PDNA)	4,99,375/-	10,000/-	Two Months	Rs. 350/-	Class-D
6	Restoration of Rain Damages on Belag to Bhumplu Da Ghat road km 0/00 to 1/500 (SH:- Repair of pot holes) (PDNA)	4,99,336/-	10,000/-	Two Months	Rs. 350/-	Class-D
7	R/M of various roads under Bhoranj Sub Division HPPWD Bhoranj (Section Bhareri) (SH:- Maintenance of earthen shoulder, Unlined drain)	99229/-	2000/-	Two Months	Rs. 350/-	Class-D
8	R/M of various roads under Bhoranj Sub Division HPPWD Bhoranj (Section Bhoranj) (SH:- Maintenance of earthen shoulder , unlined surface drain)	99229/-	2000/-	Two Months	Rs. 350/-	Class-D
9	R/R damages on Jijwin Awaldevi Chamboh road km 0/00 to 9/255 (SH:- C/O wire crate at RD 5/950 to 5/955.65)	98,114/-	2000/-	Two Months	Rs. 350/-	Class-D
10	Restoration of Hamirpur Jahu road km 21/00 to 23/00 (SH:-Repair of Pot hole) (PDNA)	4,98,567/-	10,000/-	Two Months	Rs. 350/-	Class-D

11	R/R damages on Jijwin Awahdevi Chamboh road Km 0/00 to 9/255 (SH:- C/O wire crate at RD 5/961.30 to 5/966.95)	98114/-	2000/-	Two Months	Rs. 350/-	Class-D
12	Restoration of link road Vety. Hospital Bhareri to Amroh via Fakruhi Hanoh km 0/00 to 2/420 (SH:- Providing & Laying Interlocking Paver Block and V-shape drain km 1/100 to 1/180)(PDNA)	498437/-	10000/-	Two Months	Rs. 350/-	Class-D
13	Restoration of Awahdevi Bhamboh road Km 0/00 to 1/800 (SH:- C/O 900 mm dia RCC Hume pipe culvert at RD 1/150 & Repair of pot holes at various RDs)(PDNA)	2,73,547/-	6000/-	Two Months	Rs. 350/-	Class-D
14	Restoration on link road Bhareri to Dadu via Forest Rest House km. (SH:- C/O edge wall at RD 1/210 to 1/218, interlocking Paver Block at RD 9/600 to 0/683 and V-shape drain km. 0/00 to 1/00) (PDNA)	4,89,504/-	10,000/-	Two Months	Rs. 350/-	Class-D
15	Restoration on link road Bhareri Hanoh km 0/00 to 3/700 (SH:- P/L interlocking Paver Block at RD 0/060 to 0/150). (PDNA)	4,80,528/-	10,000/-	Two Months	Rs. 350/-	Class-D
16	Restoration on link road Bhareri to Dadu via Forest Rest House km.(SH:-C/O edge wall at RD 1/210 to 1/218, interlocking Paver Block at RD 0/800 to 0/870 and V-shape drain km 0/00 to 1/00) (PDNA)	4,97,137/-	10,000/-	Two Months	Rs. 350/-	Class-D
17	Repair & Restoration of Bhiar Kot Road (SH:- P/L C.C. Pavement at RD 0/150 to 0/210 & 0/680 to 0/770) (under PDNA)	4,99,050/-	10000/-	Two Months	Rs. 350/-	Class-D
18	Repair/Restoration on Mundkhar Manoh via Neli Jamli road km 0/00 to 4/255 (SH:- C/O B/wall at RD 2/645 to 2/665)(PDNA)	2,94,889/-	6,000/-	Two Months	Rs. 350/-	Class-D
19	Restoration/Repair on Mundkhar to Manoh via Neli Jamli road 0/00 to 4/225. (SH:-Providing and installation of Crash Barrier at RD 3/00 to 3/129) (PDNA)	4,90,200/-	10,000/-	Two Months	Rs. 350/-	Class-D
20	Repair/Restoration on Nadoh to Manoh via Naltu Road km 0/00 to 1/600 (SH:- C/O R/wall at RD 0/780 to 0/790, & 0/950 to 0/960) (PDNA)	3,42,621/-	7,000/-	Two Months	Rs. 350/-	Class-D
21	Repair/Restoration on Nadoh to Manoh via Naltu Road km 0/00 to 1/600 (SH:- C/O R/wall at RD 1/350 to 1/358, & 1/080 to 1/100) (PDNA)	4,98,952/-	10,000/-	Two Months	Rs. 350/-	Class-D
22	Restoration/Repair on Mundkhar to Manoh via Neli Jamli road 0/00 to 4/225. (SH:- Providing and installation of Crash Barrier at RD 2/240 to 2/359) (PDNA)	4,94,000/-	10,000/-	Two Months	Rs. 350/-	Class-D

The earnest money in the shape of National Saving Certificate/ Time Deposit/ saving account of any post office or FDR of Nationalized Bank duly pledged in the name of undersigned must be accompanied with each tender. The Conditional tender and tender not accompanying the earnest money in the proper mode of deposit with summarily be rejected.

The Tender documents to be sent should have invariably be waxed in sealed cover and in failure of that those will not be entertained.

The Copy of valid enlistment, GST Registration No. Income Tax PAN No. & EPF No. must be attached with application.

TERMS AND CONDITIONS:-

The tender form will be issued to those contractors who have relevant machinery and equipment, the list of which any be attached with their applications (The proof of ownership of machinery/ legal tie up arrangement).

The tender forms will not be issued to those contractors whose performance is not found satisfactory.

The tender form will not be issued to those contractors who have already two works in hand. The earnest money for the above work should be submitted with the application for the purchase of the tender forms. The application received without earnest money shall summarily be rejected.

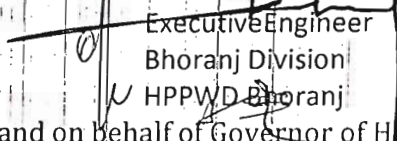
The conditional/ ambiguous/ telephonic tenders or tender by fax shall not entertain considered in any case.

(i) No Violation of social distancing.

(ii) Mandatorily wearing of face cover by everyone.

(iii) It is further added that any violation of the National directives & guidelines of containment of pandemic Covid-19 is liable for prosecution under section of IPC 1860.

Certified that the above work is of emergent nature in exigency of Public interest.

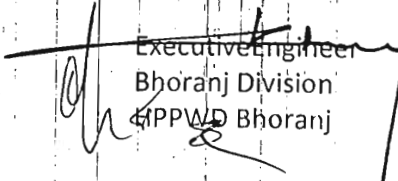

Executive Engineer
Bhoranj Division
HPPWD Bhoranj
For and on behalf of Governor of HP.

No:-PW/BHD/TA/NIT/2025- 12776-12820

Dated:-22-11-2025

Copy forwarded for information & necessary action to:-

1. The Engineer-in-Chief, Nirman Bhawan Nigam Vihar, HP:PWD., Shimla.
2. The Chief Engineer (HZ) HPPWD., Hamirpur.
3. The Superintending Engineer, 8th Circle HPPWD, Hamirpur.
4. All the Superintending Engineers/ Executive Engineers in HP:PWD.
5. The Deputy Commissioner, Hamirpur.
6. The Tehsildar, Bhoranj.
7. The B. D. O. Bhoranj.
8. The Municipal Committee, Bhoranj.
9. All the Assistant Engineers working under this Division.
10. Accounts Branch/ Drawing Branch/ Notice Board.
11. LokMitra, Bhoranj, Various Contractors/ Firms.


Executive Engineer
Bhoranj Division
HPPWD Bhoranj

SCHEDULE OF QUANTITY

305-1

Name of Work:-C/O Link road Chhatrail to lower Dadu Km. 0/00 to 1/630 (SH:- ROFD Bed cutting 5/7 mtr. wide road at RD. 1/505 to 1/565).

Estimated cost:- 99,028/-
Earnest Money:- 2000/-
Time:- 2 months

Sr. No.	Description of item	Qty.	Rate	Rate in words	Unit	Amount
1	Excavation in earth work in hilly area in all heights and depths in all kinds of soil including saturated soil comprising of mixed soil, ordinary and hard rock. All work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, Water pollution, etc and to protect soil stability of hill side rock shall be excavated with chiseling and wedging our rock. (where blasting is prohibited). All earth work in cutting/excavation including rock excavation shall be carried out true to line, grades, slopes, width, camber, super elevation and level as shown on the drawing as per direction of Engineer in Charge in conformity with the requirement of technical specification for rural roads august 2004 clause 16.2 of general conditions of contract to achieve designed formation width including hauling and stacking of material useful for construction at suitable sites and stage, disposal of unsuitable cut material in specified manner, trimming/filling of unevenness blinding and finishing of the road to specified dimensions or as directed by Engineer in charge for smooth riding. The recovery of useful stones shall be made from the contractor and recovery of 19.04 cubic meter useful stones shall be made @ 300/-per cubic meter on prorata basis in each running bill. Any loss to the public and private property during the course of excavation shall be resorted by the contractor what so ever the nature of the same may be. The servicable material will be stacked out specified dimension in all leads and lifts as per the direction of Engineer in Charge.	380.88	260.00			
Total						

Terms and Condition:-

1. Work shall be executed as per PWD specification.


Executive Engineer
Bhoranj Division
H.P.PWD Bhoranj

SCHEDULE OF QUANTITY

Job-2

NAME OF WORK:- R/M of Drainage Bassi Badyana Lawanyana Manoh road Km 0/0 to 5/00 (SH:- Maintenance of earthen shoulder & Unlined Surface Drain)

Estimated Cost Rs 99,876/-
Earnest Money Rs. 2000/-
Time 2 Months

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Maintenance of earthen shoulder filling with fresh selected soil/maintenance of earthen shoulder stripping of excess soil making up loss of material irregularity on shoulders to the design level by adding fresh approved soil and compacting with appropriate equipment as per technical specification clause no 1903 including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	1120.00	Per square metre			
2	Construction of unlined surface drain of average cross sectional area 0.40 Sqm in soil to specified lines , grades, level and dimensions . Excavated material to be used in embankments with a lift up to 3 Mtr. and lead of 50 Mtr. (average lead 25 m) as per technical specification clause 307 as directed bythe engineer in charge including entire carriage of material in all lead and lifts and other incidentals . The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	220.00	Per Running Mtr.			
	Total					
	Terms and Condition:-					

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhoranj Division
H.P.W.D Bhoranj

Job-3

SCHEDULE OF QUANTITY

NAME OF WORK:- Restoration on Dadu-Chatrial road km. 0/00 to 1/250. (SH:- P/L interlocking paverblock at RD 1/130 to 1/200). (PDNA)

Estimated Cost Rs 4,98,252/-
Earnest Money Rs. 10000/-

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Earth work in excavation for all types of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetera in all type of classification of soil, comprising of ordinary soil, ordinary rock, hard rock, chiseling, wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and bracing removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring an structing and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	71.21	Per Cubic Meter		Time	2 Months
2	Providing and laying cement concrete 1:4:8 (1 cement: 4: sand: 8 graded stone aggregates 40mm nominal size) and curing complete excluding cost of form work in foundation and plinth, as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	1.13	Per Cubic Meter			
3	Providing concrete for plant/ reinforced concrete in P.C.C. grade M-10(M-ten) nominal mix 1:3:6 (one cement: three sand: six graded crushed stone aggregate) 20mm (twenty millimeters) nominal size in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203 as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	11.20	Per Cubic Meter			
4	Providing and laying reinforced cement concrete pipe NP2 for culverts on first class bedding of granular materials in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection work, back filling, concrete and masonry work in head walls and parapets clause 1108, 900mm (nine hundred millimeters) dia. as per direction of Engineer-in-charge including entire carriage of material within all leads and lifts. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	12.50	Per Rmtr.			
5	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level 1:5:10 (1 cement: 5 fine sand: 10 graded stone aggregate 40 mm nominal size) as per direction of Engineer-in-charge excluding entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	74.25	Per Cubic Meter			
6	Backfilling behind abutment, wing wall and return wall complete as per drawing & technical specification clause 1204.3.8, and as per direction of Engineer-in-charge. i) Granular material. including entire carriage of material within all leads and lifts and as per direction of Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	34.50	Per Cubic Meter			
7	Providing weep holes in brick/stone masonry/ plain/ reinforced concrete abutment, wing walls, return walls, retaining walls and breast wall with 110mm (one hundred ten millimeter) dia PVC pipe De-plastiflex vecus pipe having pressure 4kg per centimeter square. (four kilogram per centimeter square) extending through the full width of the structures with slopes of (1V): 20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 as per direction of Engineer-in-charge, including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	36.00	Each			
Total						

Terms and Condition:-

1. Work shall be executed as per PWD specification.

Prepared by
Checked by
Approved by
Date

SCHEDULE OF QUANTITY

NAME OF WORK:- R/M of Damages Bhorani Balore Samlog road km. 0/00 to 5/00 (SH:- Maintenance of earthen shoulder & Unlined Surface Drain)

Estimated Cost
Earnest Money
Rs 99,876/-
Rs. 2000/-
2 Months

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Maintenance of earthen shoulder filling with fresh selected soil/maintenance of earthen shoulder stripping of excess soil making up loss of material irregularation on shoulders to the design level by adding fresh approved soil and compacting with appropriate equipment as per technical specification clause no 1903 including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	1120.00	Per square metre			
2	Construction of unlined surface drain of average cross sectional area 0.40 Sqm in soil to specified lines , grades, level and dimensions . Excavated material to be used in embankments with a lift up to 3 Mtr. and lead of 50 Mtr. (average lead 25 m) as per technical specification clause 307 as directed bythe engineer in charge including entire carriage of material in all lead and lifts and other incidentals . The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	220.00	Per Running Mtr.			
	Total					
	Terms and Condition:-					

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhorani Division
H.R.PWD Bhorani

DRAFT SCHEDULE OF QUANTITY

NAME OF WORK:- Restoration of Hamirpur Jahu road km. 23/00 to 32/00 . (SH:- Maintenance of Removal of Slip) PDNA

Estimated Cost
Earnest Money
Time
Rs 4,99,375-
Rs. 10000/-
2Months

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Removal of land slide in hilly area in ordinary rock not required blasting by mechanical means including cutting and trimming og slope and disposal of cut material with in lift upto 1.50 mtr. (one point five zero meter) and leads up to 1000 mtr (one thousand meter) as per technical specification 302.3.5 and 1611 and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	3995.00	Per cubic meter	125.00	Rupees one hundred twenty five only	499375.00
Total						499375.00

Terms and Condition:-

DNT . NO:- 478 for the year 2025-26 recommended for approval for Rs 4,99,375/-Rupees Four lakh ninety nine thousand three hundred seventy five jonly.

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhopral Division
HB PWD Bhopral

SCHEDULE OF QUANTITY

NAME OF WORK:- Restoration of Rain Damages on Belag to Bhumplu da Ghat road km 0/00 to 1/500 (SH:- Repair of pot holes) (PDNA)

Estimated Cost
Earnest Money

Rs 4,99,336/-
10000/-
2Months

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Repair to pot holes and removal of loose material, trimming of sides, cleaning of surface by providing tack coat 20mm (twenty millimeters) thick premix carpet and seal coat type-B with VG-10 bitumen specification clause 1904-2,503 and 508-1 as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	1345.17	Per square metre			
2	Providing and laying spreading and compacting stone aggregate of specific size to water bound macadam specification including spreading in uniform thickness hand packing rolling with smooth wheel roller 80-100 KN in stages to proper grade and camber applying and brooming stone sceening/binding material to fill up the interstices of course aggregate watering and compacting to the required density grading-III as per technical specification clause 405 by manual means, as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals,including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	6.70	Per cubic meter			
	Total					

Terms and Condition:-

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhorani Division
HRP/PWD Bhorani

SCHEDULE OF QUANTITY

NAME OF WORK:- R/M of Various roads under Bhoranj sub Division HP PWD Division Bhoranj.
(Section Bhoranj) (SH:- Maintenance of earthen shoulder, Unlined Surface drain)

Estimated Cost Rs. 98,229/-
Earnest Money Rs. 2000/-
Time 2 Months

Sr No	Description of Items	Quantity	Unit	Rate	Rates In Words	Amount
1	Maintenance of earthen shoulder filling with fresh selected soil/maintenance of earthen shoulder stripping of excess soil making up loss of material irregularities on shoulders to the design level by adding fresh approved soil and compacting with appropriate equipment as per technical specification clause no 1903 including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	1120.00	Per Cubic metre			
2	Construction of unlined surface drain of average cross sectional area 0.40 Sqm in soil to specified lines, grades, level and dimensions. Excavated material to be used in embankments with a lift up to 3 Mtr. and lead of 50 Mtr. (average lead 25 m) as per technical specification clause 307 as directed by the engineer in charge including entire carriage of material in all lead and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	198.00	Per Cubic metre			
	Total					
	Terms and Condition:-					

1 Work shall be executed as per PWD specification.

Executive Engineer
Bhoranj Division
HP PWD Bhoranj

SCHEDULE OF QUANTITY

NAME OF WORK:- R/M of Various roads under Bhorani sub Division HPPWD Division Bhorani
(Section Bhorani) (SH:- Maintenance of earthen shoulder, Unlined Surface drain)

Estimated Cost
Earnest Money
Time
Rs 99,228/-
Rs. 2000/-
2 Months

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Maintenance of earthen shoulder filling with fresh selected soil/maintenance of earthen shoulder stripping of excess soil making up loss of material irregularity on shoulders to the design level by adding fresh approved soil and compacting with appropriate equipment as per technical specification clause no 1903 including entire cartage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	1120.00	Per Cubic metre			
2	Construction of unlined surface drain of average cross sectional area 0.40 Sqm in soil to specified lines, grades, level and dimensions. Excavated material to be used in embankments with a lift up to 3 Mtr. and lead of 50 Mtr. (average lead 25 m) as per technical specification clause 307 as directed by the engineer in charge including entire cartage of material in all lead and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	198.00	Per Cubic metre	2000/-		
	Total					
	Terms and Condition:-					

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhorani Division
HP PWD Bhorani

SCHEDULE OF QUANTITY

NAME OF WORK:- R/R Damages on Jliwin Awahdevi Chamboh road km. 0/00 to 9/255.(SH:- C/O Wire crate at RD.5/950 to 5/955.65)

Estimated Cost
Earnest Money

Rs. 98,114/-
Rs. 2000/-

Sr No	Description of Items	Quantity	Unit	Rate	Time	
					Rate in words	Amount
1	Earth work in excavation for all types of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetera in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock, chiseling/wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and bracing removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring an structing and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	8.83	Per Cubic Meter			
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeters) dia GI with conforming to IS:280 and IS: 4826 in 100mmx100mm(one hundred millimeters into one hundred millimeters) mesh (woven diagonally) including 10 (ten) percent extra for laps and joints laid with stone boulder weighing not less than 25Kg. (twenty five kilogramme) each as per drawing and technical specifications clause 1301 as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	26.49	Per cubic metre			
3	Backfilling behind abutment, wing wall and return wall complete as per drawing & technical specification clause 1204.3.8, and as per direction of Engineer-in-Charge. i) Granular material, including entire carriage of material within all leads and lifts and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	10.51	Per Cubic Meter			
Total						

Terms and Condition:-

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhorani Division
HDPWD Bhorani

SCHEDULE OF QUANTITY

NAME OF WORK:- Restoration of Hamirpur Jahu road km. 21/00 to 23/00 . (SH:- Repair of pot hole) (PDNA)

Estimated Cost Rs. 4,98567-
Earnest Money Rs. 10000/-
Time 2Months

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Repair to pot holes and removal of loose material, trimming of sides, cleaning of surface by providing tack coat, 20mm (twenty millimeters) thick premix carpet and seal coat type-B with VG-10 bitumen specification clause 1904-2, 503 and 508-1 as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	1197.72	Per square metre			
2	Providing Laying spreading and compacting stone aggregate of specific size to water bound macadam specification including spreading in uniform thickness hand packing rolling with smooth wheel roller 80-100 KN in stages to proper grade and camber applying and brooming stone screening/binding material to fill up the interstices of course aggregate watering and compacting to the required density grading-III as per technical specification clause 405 by manual means, as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals, including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	29.95	Per cubic meter			
Total						

Terms and Condition:-

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhoranj Division
H.PWD Bhoranj

SCHEDULE OF QUANTITY

NAME OF WORK:- R/R Damages on Jiwin Awahdevi Chamboh road km. 0/00 to 9/255.(SH:- C/O Wire crate at RD.5/961.30 to 5/966.95)

Estimated Cost
Earnest Money

Rs 98114
Rs 24422/-
Rs. 2000/-

Sr No	Description of Items	Time			Amount
		Quantity	Unit	Rate	
1	Earth work in excavation for all types of road structure such as retaining walls ,breast walls, culverts, drains and parapets etcetera in all type of classification of soil comprising of ordinary soil , ordinary rock , hard rock, chiseling/wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and bracing removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring an structing and pumping and bailing out water (Surface and sub sol water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	8.83	Per Cubic Meter		
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeters) dia GI with conforming to IS:280 and IS: 4826 in 100mmx100mm(one hundred millimeters into one hundred millimeters) mesh (woven diagonally) including 10 (ten) percent extra for laps and joints laid with stone boulder weighing not less than 25kg. (twenty five kilogramme) each as per drawing and technical specifications clause 1301 as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	26.49	Per cubic metre		
3	Backfilling behind abutment, wing wall and return wall complete as per drawing & technical specification clause 1204.3.8, and as per direction of Engineer-in-Charge. i) Granular material. including entire carriage of material within all leads and lifts and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	10.51	Per Cubic Meter		
Total					

Terms and Condition:-

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhoranj Division
P.W.D. Bhoranj

SCHEDULE OF QUANTITY

NAME OF WORK:- Restoration of link road very hospital bharen to amroha via fakruhi hanoh km. 0/00 to 2/420 . (SH:- Providing & Laying interlocking paver Block and V-shape drain km. 1/100 to 1/180). (PDNA)

Estimated Cost
Earnest Money
Rs 498437/-
Rs. 10000/-
2Months

Sr No	Description of Items	Quantity	Unit	Rate	Rate in words	Amount
1	Earth work in excavation for all types of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetera in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock, chiseling, wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and craning removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring an structing and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government	23.40	Per Cubic Meter			
2	Providing concrete for pleaty reinforced concrete in P.C.C. grade M ₁₀ (M-ten) nominal mix 1:3:6 (one cement : three sand : six graded crushed stone aggregate) 40mm(forty millimeters) nominal size in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203 as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	29.05	Per cubic metre			
3	Providing and laying mechanically mixed cement concrete (M-20)(M-twenty) 1:2:4 one cement : two sand : four graded crushed stone aggregate) 20mm(twenty millimeters) for plain /reinforcement concrete in open foundation complete including cost of form work steel plate complete as per drawings and technical specification Clause 802, 803 1202 & 1204 including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government	9.98	Per Cubic Meter			
4	Providing and laying heavy duty precast cement concrete interlocking paver blocks vibro compacted upto M-50(M-fifty) grade including border or kurb block grey or coloured over sub base of concrete with 25mm (twenty millimeters) thick average thickness of cement 1:4 (one cement: four sand) laid over and jointed with neat cement slurry mixed with pigment to match the shade of blocks including curing rubbing and polishing complete (sub base concrete) floor to be paid for 80mm(eighty millimeters) thick interlocking blocks ISI approved, and as per direction of the Engineer-in-charge including entire carriage of materials within all leads and lifts including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government	234.00	Per square meter			
Total						

Terms and Condition:-

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhoranj Division
H.P.W.D Bhoranj

SCHEDULE OF QUANTITY

NAME OF WORK:- Restoration on link road Bhareti to Dadu via Forest Rest House Km.(SH:- C/O edge Wall at RD 1/210 to 1/218 , Interlocking Paver Block at Rd.0/600 to 0/683 and V-Shape drain Km. 0/00 to 1/00). (PNDNA)

Estimated Cost
Earnest Money
Rs 4,89,504/-
Rs.10000/-
2 month

Sl No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Earth work in excavation for all types of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetera in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock, chiselling/wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and bracing removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring an structing and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	31.13	Per Cubic Meter			
2	Providing and laying plain reinforced concrete in P.C.C. grade M-10 (M-ten) nominal mix 1:3:6 (one cement : three sand : six graded crushed stone aggregate) 20mm (twenty millimeters) nominal size in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203 as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	30.91	Per cubic meter			
3	Providing and laying mechanically mixed cement concrete (M-20) (M-twenty) 1:2:4 one cement : two sand : four graded crushed stone aggregate) 20mm (twenty millimeters) for plain reinforcement concrete in open foundation complete including cost of form work steel plate complete as per drawings and technical specification Clause 802, 803 1202 & 1204 including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	3.74	Per Cubic Meter			
4	Providing and laying heavy duty precast cement interlocking paver blocks upto compacted upto M-50 (M-fifty) grade including border or half block grey or coloured over sub base of concrete with 25mm (twenty millimeters) thick average thickness of cement 1:4 (one cement : four sand) laid over and jointed with neat cement slurry mixed with pigment to match the shade of blocks including curing rubbing and polishing complete (sub base concrete) floor to be paid for 80mm (eighty millimeters) thick interlocking blocks (ISI approved), and as per direction of the Engineer-in-charge including entire carriage of materials within all leads and lifts including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	249.00	Per square meter			
Total						
Terms and Condition:-						

1 Work shall be executed as per PWD specification.

Executive Engineer
Bhoranj Division
H.P.W.D Bhoraaj

SCHEDULE OF QUANTITY

NAME OF WORK:- Restoration on link road Bharati Hanoh Km. 0/00 to 3/700 (SH:- P/L Interlocking Paver Block at RD.0/060 to 0/150). (PDNA)

Estimated Cost
Earnest Money
Time
Rs 4,80,528/-
Rs.10000/-
2 month

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Providing concrete for plain/ reinforced concrete in P.C.C. grade M-10(M-ten)nominal mix 1:3:6 (one cement : three sand : six graded crushed stone aggregate) 20mm(twenty millimeters) nominal size in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203 as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	27.00	Per cubic meter			
2	Providing and laying mechanically mixed cement concrete (M-20)(M-twenty) 1:2:4 one cement : two sand : four graded crushed stone aggregate) 20mm(twenty millimeters) for plain /reinforcement concrete in open foundation complete including cost of form work steel plate complete as per drawings and technical specification Clause 802, 803 1202 & 1204 including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octroi, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	2.88	Per Cubic Meter			
3	Providing and laying heavy duty precast cement concrete interlocking paver blocks vibro compacted upto M-50(M-fifty) grade including border or kurb block grey or coloured over sub base of concrete with 25mm (twenty millimeters) thick average thickness of cement 1:4 (one cement: four sand) laid over and jointed with neat cement slurry mixed with pigment to match the shade of blocks including curing rubbing and polishing complete (sub base concrete) floor to be paid for 80mm(eighty millimeters) thick inter locking blocks (ISI approved), and as per direction of the Engineer-in-charge including entire carriage of materials within all leads and lifts including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octroi, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government	270.00	Per square meter			
Total						
Terms and Condition:-						

1. Work shall be executed as per PWD specification.

Executive Engineer
Bharati Division
H.P.W.D. Bharati

SCHEDULE OF QUANTITY

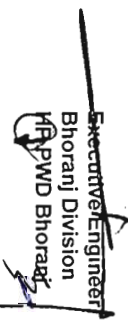
NAME OF WORK:- Restoration on link road Bhareri to Dadu via Forest Rest House Km.(SH:- C/O edge Wall at RD 1/210 to 1/218 , Interlocking Paver Block at Rd,0/800 to 0/870 and V-Shape drain Km. 0/00 to 1/00). (PDNA)

Estimated Cost
Earnest Money
Rs 4,97,137/-
Rs.10000/-
2 month

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Earth work in excavation for all types of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetera in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock, chiseling/wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and bracing removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) (compacted thickness including shoring a structure and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	26.25	Per Cubic Meter			
2	Providing concrete for plain/ reinforced concrete in P. C. C. grade M-10(M- ten) nominal mix 1:3:6 (one cement : three sand : six graded crushed stone aggregate) 20mm(twenty millimeters) nominal size in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203 as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	26.07	Per cubic meter			
4	Providing and laying mechanically mixed cement concrete (M-20) (M-twenty) 1:2:4 one cement : two sand : four graded crushed stone aggregate) 20mm(twenty millimeters) for plain /reinforcement concrete in open foundation complete including cost of form work steel plate complete as per drawings and technical specification Clause 802, 803 1202 & 1204 including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	3.15	Per Cubic Meter			
5	Providing and laying heavy duty precast cement interlocking paver blocks vibro compacted upto M-50(M-fifty) grade including border or kurb block grey or coloured over sub base of concrete with 25mm (twenty millimeters) thick average thickness of cement 1:4 (one cement: four sand) laid over and jointed with neat cement slurry mixed with pigment to match the shade of blocks including curing rubbing and polishing complete (sub base concrete) floor to be paid for 80mm(eighty millimeters) thick inter locking blocks (ISI approved), and as per direction of the Engineer-in-charge including entire carriage of materials within all leads and lifts including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government	210.00	Per square meter			
6	Providing and laying mechanically mixed cement concrete 1:5:10 (one cement:five sand: ten graded crushed stone aggregate 40mm (forty millimetre nominal size) and curing complete including cost of form work with M.S. plates for plain concrete on ground or under water and curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights and depths. In retaining walls /breast walls complete as per drawings and technical specifications Clause 802, 803, 1200 and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	17.60	Per Cubic Meter			
7	Providing weep holes in brick/stone masonry/ plain/ reinforced concrete abutment, wing walls, return walls, retaining walls and breast wall with 110mm(one hundred ten millimeter) dia PVC pipe De-plast/finolex/ veculus pipe having pressure 4kg. per centimeter square. (four kilogram per centimeter square) extending through the full width of the structures with slopes of (1V): 20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 as per direction of Engineer- in -Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	16.00	Each			

7	Backfilling behind abutment, wing wall and return wall complete as per drawing & technical specification clause 1204.3.8, and as per direction of Engineer-in-Charge. i) Granular material. Including entire carriage of material within all leads and lifts and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	4.80	Per Cubic Meter				
	Total						
	Terms and Condition:-						

1. Work shall be executed as per PWD specification.


Executive Engineer
Bhoranj Division
M.P.W.D Bhoranj

NAME OF WORK:- Repair & Restoration of Bihar Kot Road. (SH:- P/L C.C.Pavement at RD 0/150 to 0/210 & 0/680 to 0/770.) (UNDER PDNA)

SCHEDULE OF QUANTITY

Estimated Cost
Earnest Money
Time
Rs. 499050/-
Rs. 10000/-
2Months

Sr No	Description of Items	Quantity	Unit	Rate	Rate in words	Amount
1	Earth work in excavation for all types of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetera in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock, chiseling/wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and bracing removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring a structing and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	45.00	Per Cubic Meter			
2	Providing concrete for plain/ reinforced concrete in P.C.C. grade M-10 (M-ten) nominal mix 1:3:6 (one cement : three sand : six graded crushed stone aggregate) 40mm(forty millimeters) nominal size in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203 as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	45.00	Per cubic metre			
3	Providing and laying mechanically mixed cement concrete (M-20) (M-twenty) 1:2:4 one cement : two sand : four graded crushed stone aggregate) 20mm(twenty millimeters) for plain/reinforcement concrete in open foundation complete including cost of form work steel plate complete as per drawings and technical specification Clause 802, 803, 1202 & 1204 including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octroi, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	45.00	Per Cubic Meter			
	Total					

Terms and Condition:-

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhoranj Division
HP PWD Bhoranj
28

SCHEDULE OF QUANTITY

NAME OF WORK:- Repair/Restoration on Mundkhar Manoh via Neill jamli road km. 0/00 to 4/255 (SH:- C/O B/wall at RD 2/645 to 2/665) (PDNA)

Estimated Cost
Earnest Money
Rs 2,94,889/-
Rs. 6000/-
2 month

Sr No	Description of Items	Quantity	Unit	Rate	Rates in Words	Amount
1	Earth work in excavation for all types of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetera in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock, chiseling/wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and bracing removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts including dressing of sides and bottom and other filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring a structuring and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	36.60	Per Cubic Meter			
2	Providing and laying mechanically mixed cement concrete 1:5:10 (one cement:five sand :ten graded crushed stone aggregate 40mm (forty millimetre nominal size) and curing complete including cost of form work with M.S. plates for plain concrete on ground or under water and curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights and depths. In retaining walls /breast walls complete as per drawings and technical specifications Clause 802, 803, 1200 and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	63.85	Per Cubic Meter			
3	Providing weep holes in brick/stone masonry/ plain/ reinforced concrete abutment, wing walls, return walls, retaining walls and breast wall with 110mm(one hundred ten millimeter) dia PVC pipe De-plas/finolex/ vecdus pipe having pressure 4kg.per centimeter square. (four kilogramme per centimeter square) extending through the full width of the structures with slopes of 1(V): 20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 as per direction of Engineer- in -Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	36.00	Each			
Total						
Terms and Condition:-						
1. Work shall be executed as per PWD specification.						

Executive Engineer
Bhoranj Division
H.P.W.D Bhoranj

NAME OF WORK:- R/M of link road Pipildhar to upper Tella Km. 0/00 to 0/500 (SH:- Repair of pot holes & Maintenance of earthen shoulder,)

SCHEDULE OF QUANTITY

Sr No	Description of Items	Quantity	Unit	Rate	Estimated Cost	
					Earnest Money Time	Rates in Words
1	Earth work in excavation for all types of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetera in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock, chiseling/wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and bracing removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts including dressing of sides and bottom and other filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring an structing and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	37.40	Per Cubic Meter			
2	Providing and laying mechanically mixed cement concrete 1:5:10 (one cement:five sand :ten graded crushed stone aggregate 40mm (forty millimetre nominal size) and curing complete including cost of form work with M.S. plates for plain concrete on ground or under water and curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights and depths. In retaining walls /breast walls complete as per drawings and technical specifications Clause 802, 803, 1200 and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	71.40	Per Cubic Meter			
3	Providing weep holes in brick/stone masonry/ plain/ reinforced concrete abutment, wing walls, return walls, retaining walls and breast wall with 110mm (one hundred ten millimeter) dia PVC pipe De-plast/finolex/ vecus pipe having pressure 4kg per centimeter square. (four kilogramme per centimeter square) extending through the full width of the structures with slopes of 1(V): 20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204,3.7 as per direction of Engineer- in -Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	32.00	Each			
3	Backfilling behind abutment, wing wall and return wall complete as per drawing & technical specification clause 1204.3.8, and as per direction of Engineer-in-Charge. i) Granular material. including entire carriage of material within all leads and lifts and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	17.55	Per Cubic Meter			
	Total					
	Terms and Condition:-					

1. Work shall be executed as per PWD specification.

Executive Engineer
Bhoranj Division
HP PWD Bhoranj


Rs 3,42,621/-
Rs. 7,000/-
2 month

SCHEDULE OF QUANTITY

NAME OF WORK:- Repair/Restoration on Nadoh to Manoh via Nattu Road km 0/00 to 1/600 (SH:- C/O R/Wall at RD 1/350 to 1/358 , & 1/080 to 1/100) (PDNA)

Sr No	Description of Items	Quantity	Unit	Rate	Estimated Cost Earnest Money Time	Rs 4,98,952/- Rs. 10,000/- 2 month
1	Earth work in excavation for all types of road structure such as retaining walls ,breast walls, culverts, drains and parapets etcetera in all type of classification of soil comprising of ordinary soil , ordinary rock , hard rock, chiseling/wedging out or rock (where blasting is prohibited) as per drawings and construction of shoring and bracing removal of stumps and other deleterious materials and disposal of materials upto any leads and lifts includin dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring a structing and pumping and bailing out water (Surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which arise out during dewatering as per the direction of the Engineer-in-charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	55.44	Per Cubic Meter			
2	Providing and laying mechanically mixed cement concrete 1:5:10 (one cement:five sand :ten graded crushed stone aggregate 40mm (forty millimetre nominal size) and curing complete including cost of form work with M.S. plates for plain concrete on ground or under water and curing complete including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights and depths. In retaining walls /breast walls complete as per drawings and technical specifications Clause 802, 803, 1200 and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	105.45	Per Cubic Meter			
3	Providing weep holes in brick/stone masonry/ plain/ reinforced concrete abutment, wing walls, return walls, retaining walls and breast wall with 110mm(one hundred ten millimeter) dia PVC pipe De-plas/finolex/ vecus pipe having pressure 4kg.per centimeter square. (four kilograme per centimeter square) extending through the full width of the structures with slopes of (1V): 20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 as per direction of Engineer- in -Charge including entire carriage of material within all leads and lifts and other incidentals. The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	36.00	Each			
3	Backfilling behind abutment, wing wall and return wall complete as per drawing & technical specification clause 1204.3.8, and as per direction of Engineer-in-Charge. i) Granular material, including entire carriage of material within all leads and lifts and as per direction of Engineer-in-Charge including entire carriage of material within all leads and lifts and other incidentals . The rates are inclusive octrol, royalty, Malkana, toll tax,sale tax or other taxes imposed by the Government.	21.51	Per Cubic Meter			
	Total					
	Terms and Condition:-					

1. Work shall be executed as per PWD specification.


 Executive Engineer
 Bhoranj Division
 HP PWD Bhoranj